

HYUNDAI


HT26 SPECIFICATIONS

Net Power	Operating Weight	Operating Capacity
72 hp (53.5 kW) at 2,600 rpm	10,094 lb (4,579 kg)*	2,663 lb (1,208 kg)*

ENGINE	
Make / Model	HYUNDAI DM02
Emissions Certification	Tier 4 Final / Stage V
Number of Cylinders	4
Rated Gross Power	72 hp (53.5 kW) at 2,600 rpm
Rated Net Power	72 hp (53.5 kW) at 2,600 rpm
Maximum Torque, Gross (SAE J1995)	207 lb-ft (280 Nm) at 1,600 rpm
Displacement	146 in ³ (2,392 cc)
Bore and Stroke	3 1/2" x 3 3/4" (90 x 94 mm)
Aspiration	Turbocharged
Alternator	12 V, 90 A
Air Cleaner	PowerCore
Aftertreatment	DOC

OPERATING SPECIFICATION	CANOPY	CABIN	HIGH FLOW
Operating Weight	9,662 lb (4,383 kg)	10,094 lb (4,579 kg)	10,476 lb (4,752 kg)
Breakout Force (Bucket)—ISO	6,292 lbf (2,854 kgf)		
Breakout Force (Lift Arm)—ISO	5,904 lbf (2,678 kgf)		
Lift Arm Path	Vertical		

RATED OPERATING CAPACITY			
35% Tipping Load	2,553 lb (1,158 kg)	2,663 lb (1,208 kg)	2,929 lb (1,329 kg)
Tipping Load	7,293 lb (3,308 kg)	7,606 lb (3,450 kg)	8,370 lb (3,796 kg)

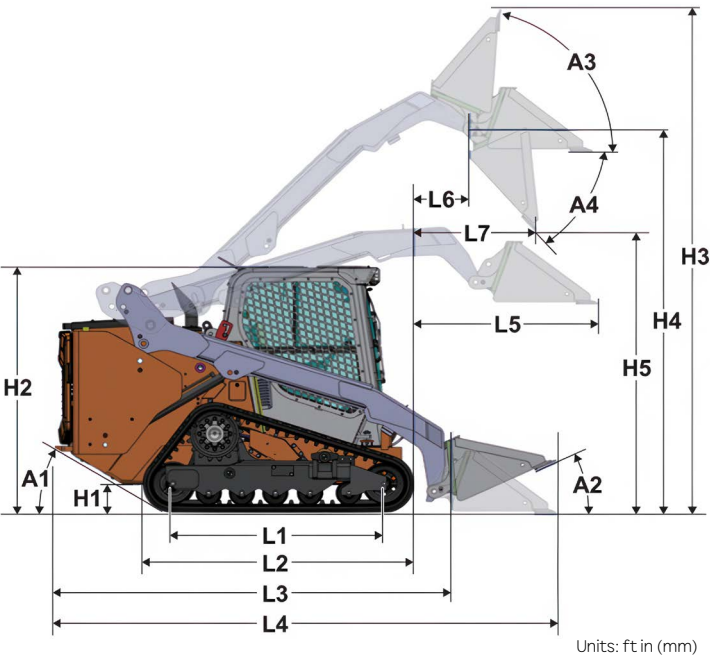


DIMENSIONS		
L1	Tumbler Distance	4' 11" (1,502)
L2	Overall Length of Track	6' 7" (2,002)
L3	Length without Bucket	10' 0" (3,052)
L4	Length with Bucket on Ground	12' 9" (3,891)
L5	Maximum Reach with Arms Parallel to Ground	5' 1" (1,558)
L6	Bucket Pin Reach at Maximum Lift	1' 10" (566)
L7	Reach at Maximum Lift and Dump	3' 8" (1,114)

HYDRAULIC SYSTEM		
Hydraulic Pressure	Standard	3,641 psi (251 bar)
	High Flow	4,281 psi (295 bar)
Hydraulic Flow	Standard	24 gpm (91 ℓ/min) at 2,600 rpm
	High Flow	30.9 gpm (117 ℓ/min) at 2,600 rpm

UNDERCARRIAGE		
Type	Rigid mount	
Track Width	12.6" (320 mm)	15.7" (400 mm)
Ground Pressure	5.6 psi (0.40 kg/cm ²)	5.2 psi (0.37 kg/cm ²)
Front Idler	Double (STD) /Triple (HIGH FLOW)	
Rear Idler	Single (STD) /Triple (HIGH FLOW)	
No. of Track Rollers (per side)	4	
Travel Speed (2-speed) low	5.9 mph (9.5 km/h)	
Travel Speed (2-speed) high	8.7 mph (14.0 km/h)	

CAPACITY		
Fuel Tank	v	
Cooling System (Radiator Capacity)	gal (ℓ)	2.6 (10)
Engine Oil		3.9 (14.6)
Hydraulic Tank	7.0 (26.5)	

SOUND	
Inside Cab (ISO 6396)	75 dB(A)
Outside Cab (EU Directive 2000/14/EC)	102 dB(A)

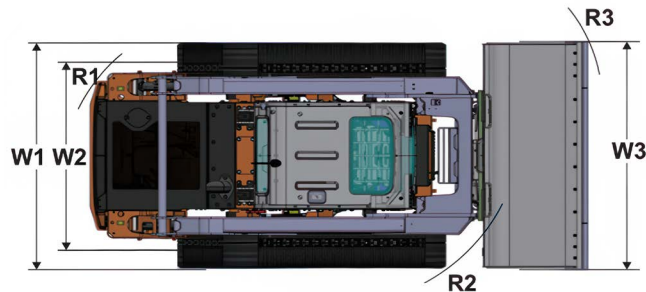

Units: ft in (mm)

DIMENSIONS		
H1	Ground Clearance	0' 9" (226)
H2	Height to Top of Cab	6' 11" (2,116)
H2'	Height to Top of Cab with Extra Oil Cooler	8' 0" (2,426)
H3	Maximum Overall Height	13' 7" (4,137)
H4	Bucket Pin Height at Maximum Lift	10' 4" (3,145)
H5	Clearance at Maximum Lift and Dump	7' 6" (2,284)
A1	Departure Angle	32°
A2	Roll Back Angle	25°
A3	Rack Back Angle at Maximum Height	86°
A4	Maximum Dump Angle	47.5°
W1	Vehicle Width 12.6" (320 mm) Shoe	6' 0" (1,821)
W1'	Vehicle Width 15.7" (400 mm) Shoe	6' 3" (1,901)
W2	Track Gauge	4' 11" (1,501)
W3	Bucket Width	6' 0" (1,829)
R1	Turning Radius from Center—Machine Rear	5' 9" (1,747)
R2	Turning Radius from Center—Coupler	5' 1" (1,539)
R3	Turning Radius from Center—Bucket	7' 9" (2,356)

* Specs based on cab version with standard flow

HT26 STANDARD & OPTIONAL EQUIPMENT

● Standard / ○ Option / — Not available

ENGINE & COOLING	CAN	CAB	HF
Turbocharged Engine	●	●	●
Auto Idle	●	●	●
2-Stage Fuel Filtration with Water Separator	●	●	●
DOC Aftertreatment System	●	●	●
Variable Speed Hydraulic Driven Cooling Fan	●	—	—
Variable Speed Hydraulic Driven Cooling Fan with Automatic and Manual Purge Reversing Operation	—	●	●

UNDERCARRIAGE AND FRAME	CAN	CAB	HF
Rigid Mount Undercarriage	●	●	●
Triple Flange Lower Rollers (4)	●	●	●
Dual Flange Front and Single Flange Rear Idler	●	●	—
Triple Flange Front and Rear Idler	—	—	●
15.7" (400 mm) Track—Block Pattern	○	○	○
15.7" (400 mm) Track—Bar Pattern	○	●	●
12.6" (320 mm) Track—Bar Pattern	○	○	○
12.6" (320 mm) Track—Block Pattern	●	○	○
Additional Counterweight (+300 lb / 136 kg)	○	○	●
2-speed Travel	●	●	●
Creep Mode	●	●	●
Front and Rear Tie-down and Lift Points	●	●	●
Rear Bumper	●	●	●
Hinged Cooling Package with Engine Access	●	●	●

HYDRAULIC & WORKING EQUIPMENT	CAN	CAB	HF
Vertical Lift Arm Design	●	●	●
Loader Self-level: Up and Down*	●	●	●
Pushbutton Bucket Shake*	●	●	●
Return-to-dig*	●	●	●
Return-to-position*	●	●	●
Arm-end damping*	●	●	●
Arm Float	●	●	●
Standard Flow Auxiliary Hydraulics with Proportional Control	●	●	—
High-flow Auxiliary Hydraulics	—	—	●
Continuous Mode Auxiliary	●	●	●
Speed-sensitive Ride Control	—	●	●
Attachment Coupler—Manual	●	—	—
Attachment Coupler—Hydraulic	○	●	●

ELECTRICAL	CAN	CAB	HF
12 V System with 90 A Alternator	●	●	●
Guarded LED Light Package (2 Front, 2 Rear)	●	●	●
14-Pin Attachment Connector	●	●	●
Travel Alarm	●	●	●
Master On/Off Battery Disconnect	●	●	●
Hyundai Connect: Mobile (4G) type for 5 Years of Remote Machine Monitoring and Diagnostics	●	●	●

OPERATOR STATION	CAN	CAB	HF
Enclosed One-piece Cab (ROPS/FOPS Level 1)	—	●	●
Polycarbonate Swing-out Door w/ Wiper and Washer	—	●	●
High-back Mechanical Suspension Vinyl Seat	●	—	—
High-back Air Suspension Cloth Seat with heat	—	●	●
Foot Throttle (Acceleration/Deceleration)	●	●	●
Selectable Pattern (ISO, H)	●	●	●
8" Smart Touch Screen Display	●	●	●
Heat and A/C	—	●	●
Radio w/ Bluetooth®	—	●	●
12 V Charging	●	●	●
Rearview Camera	●	●	●
Around View Camera (AVM) w/ Ultrasonic Sensors	○	○	○
Cup Holder	●	●	●
Multi-Position Locking Sliding Side Windows	—	●	●
Dual USB Charging Ports	●	●	●

* Part of the Smart Assist Bundle

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.

* The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All U.S. measurements rounded off to the nearest pound or inch.

HYUNDAI

6100 Atlantic Blvd., Norcross, GA 30071
TEL (678) 823-7777 FAX (678) 823-7778



Printed in U.S.A.

building a **comfortable** tomorrow

HT26-SP 09/2026 ASv3