

Robex

260LC-9A

With Tier 4 Interim Engine installed

MOVING YOU FURTHER

HYUNDAI HEAVY INDUSTRIES



*Photo may include optional equipment.

 **HYUNDAI**
CONSTRUCTION EQUIPMENT AMERICAS, INC.

PRIDE AT WORK

Hyundai Heavy Industries strives to build state-of-the art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality.

Take pride in your work with Hyundai!



Robex 260LC-9A



*Photo may include optional equipment.

Machine Walk-Around

Engine Technology

Proven, reliable, fuel efficient, low emission and low noise
Cummins Tier 4 interim & EU stage III B engine

Hydraulic System Improvements

New patented hydraulic control for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in and boom-down flow regeneration system for added speed and efficiency

Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps
New compact solenoid block equipped with 4 solenoid valves, 1 EPPR valve, 1 check valve accumulator and pilot filter - controls 2 speed travel, power boost, boom priority, safety lock, arm regeneration

Enhanced Operator Cab

Improved Visibility

Enlarged cab with improved visibility / See-through upper skylight for visibility and ventilation
Larger right-side glass, now one piece, for better right visibility
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view

Improved Cab Construction

New steel tube construction for added operator safety, protection and durability
New window open/close mechanism designed with cable and spring lift assist and single latch release

Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use. Now with new sleek styling
Heated suspension (standard) or optional air ride suspension with heat
New joystick consoles - now adjustable in height by pushing the button
Integrated seat with consoles - reduce the operator fatigue

Advanced 7" Color Cluster with Touch Screen

New Color LCD Display with easy to read digital gauges for hydraulic oil temperature, water temperature, and fuel. Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.
3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference
Enhanced self-diagnostic features with GPS download capability
One pump flow or two pump flow for optional attachment is now selectable through the cluster /
New anti-theft system with password capability
Boom speed and arm regeneration are selectable through the monitor.
Auto power boost is now available - selectable (on/off) through the monitor.
Powerful air conditioning and heat with auto climate control
RMS (Remote Management System) works through GPS/satellite technology to ultimately provide better customer service and support.

Undercarriage

Sealed track chain (urethane seals) / Standard track rail guard / Comfortable bolt-on steps
Large upper roller cut-outs for debris clean-out / Tapered side frames for debris clean-out / Grease-type track tensioner

PRECISION

Innovative hydraulic system technologies make the 9A series excavator fast, smooth and easy to control.



*Photo may include optional equipment.

Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO(Computer Aided Power Optimization) system, flow for the job at hand. Operator can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button.

The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the electronically controlled engine to provide the optimum level of engine power and hydraulic flow.

Power Mode

P (Power Max) mode maximizes machine speed and power for mass production.

S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow and engine power based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.


Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

Improved Hydraulic System

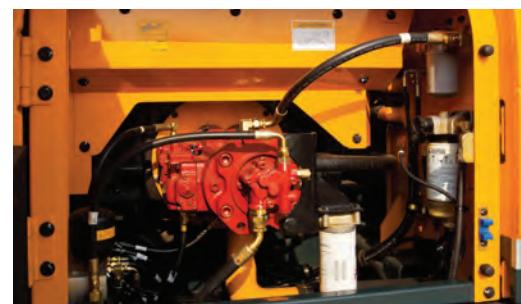

To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9A series look like a smooth operator. Newly improved features

include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.



Auto Boom-swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.

PERFORMANCE

9A series is designed for maximum performance to keep the operator working productively.

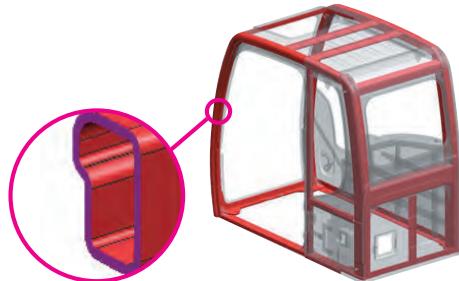


*Photo may include optional equipment.



Track Rail Guard & Adjusters

Durable track rail guards keep track links in place. Track adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs.




Structure Strength

The 9A series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame. Structural integrity was tested by way of FEM (Finite Elements Method) analysis and long-term durability tests.

The optional ROPS(Roll Over Protective Structure) cab can be equipped to enhance operator safety.

Cummins QSB6.7 Engine

QSB6.7 engine above 174 hp (130 kW) meet Tier 4 Interim/Stage III B emissions regulation with the combination of a proven cooled-EGR system, High Pressure Common Rail (HPCR) fuel system, Cummins Diesel Oxidation Catalyst and Particulate Filter. The QSB6.7 is also complemented by patented VGTTM Turbocharger, which continuously varies the airflow boost to precisely match engine rpm and load demands for optimal performance. This engine features the Cummins Direct FlowTM air filter, which has a smaller profile than radial filters. The result is an engine that fits into existing equipment, delivers better performance with faster cycle times and better fuel economy than the previous model.

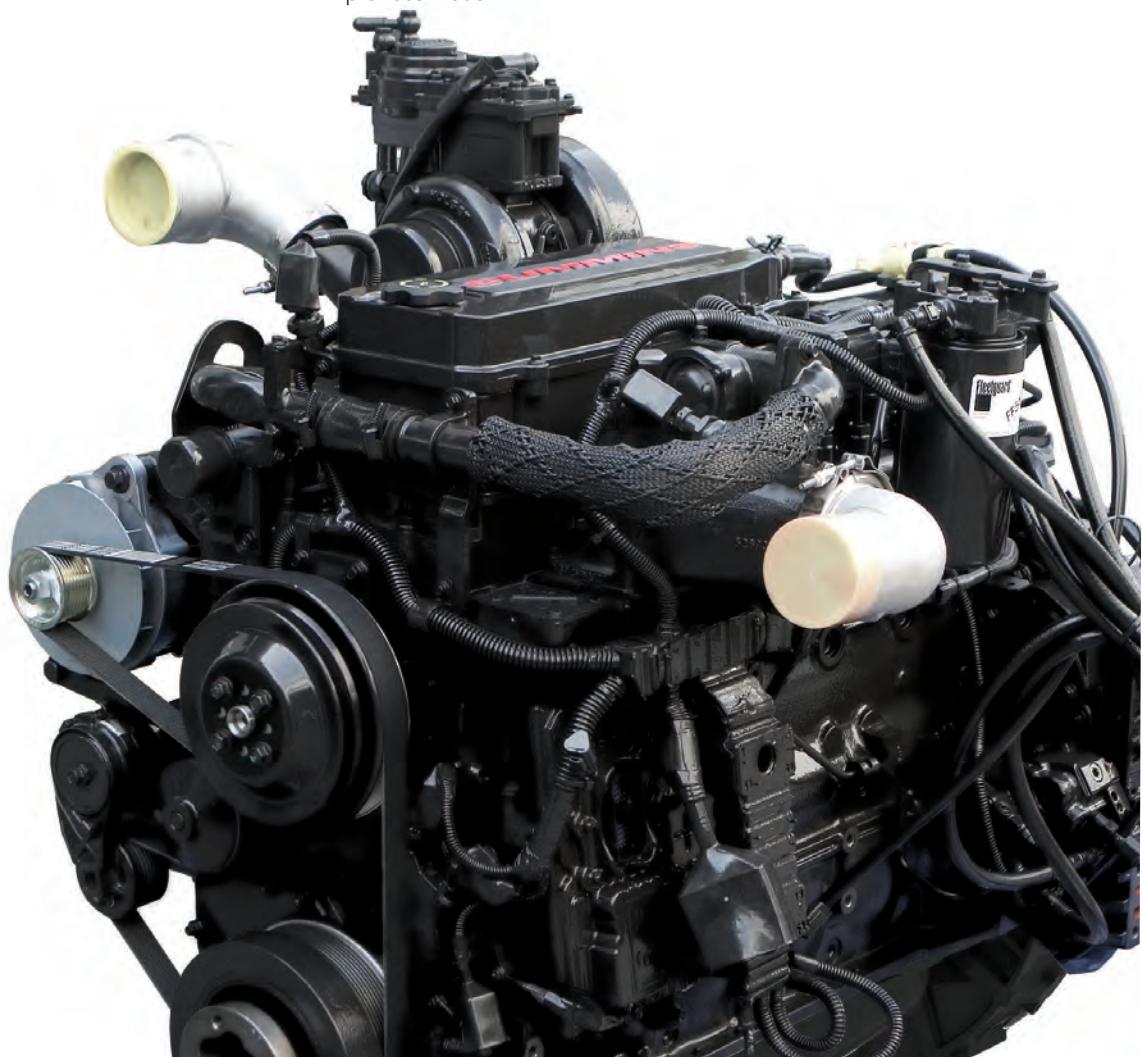


PREFERENCE

Operating a 9A series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



*Photo may include optional equipment.

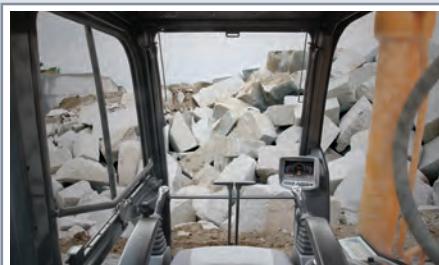

Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.

Operator Comfort

In 9A series cabin you can easily adjust the seat, console and armrest settings to best suit your comfort level. The seat integrated with console absorb console vibration by seat suspension and reduce operator's fatigue. New joystick consoles are adjustable in height by pushing the button. Other preference settings that add to overall operator comfort include the fully automatic high capacity airconditioning system, transparent polycarbonate glass sun roof, large and easy to control sun visor, and the Radio / USB player.



Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9A series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo and MP3 capabilities, plus remotely located controls is perfect for listening to music favorites.

Operators can even talk on the phone with the hands-free cell phone feature. Also, the newly designed optional remote control offers mobile bluetooth-handsfree and radio cable-handsfree function.



Smart Key System (Option)

9A series excavators provide smart key system as an option. This allows the operator to start the engine by the push of a starter button without inserting a key in the ignition.



Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD with touch screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.

The newly applied FM transmitter application transmits signal to USB & Radio player with the same frequency as cluster. The player outputs the audio through the internal speaker in the cab. The video & firmware updates are possible with USB host support and an adjustable cluster hinge bracket improves cluster visibility.

Monitor Tilt Range



PROFITABILITY

9A series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



*Photo may include optional equipment.


Fuel Efficiency

9A series excavators are engineered to be extremely fuel efficient. New innovations like the variable speed fan clutch, two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.



Hi-mate (Remote Management System)

Hi-mate, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-mate saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.

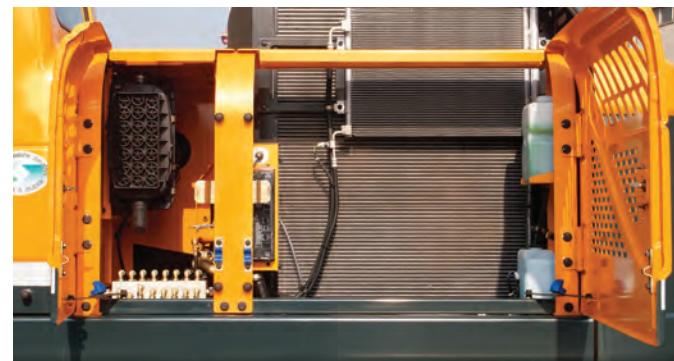

Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9A series.



Long-Life Components

9A series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

Specifications

ENGINE

MODEL		Cummins QSB6.7
Type		Water-cooled, 4-cycle Diesel, 6-cylinder in-line, Direct injection, Turbocharged, Charge air cooled, Low emission
Rated flywheel horse power	SAE	188 HP (140 kW)/ 1,900 rpm
	J1349 (net)	178 HP (132 kW)/ 1,900 rpm
	DIN	6271/1 (gross) 191 PS (140 kW)/ 1,900 rpm
	DIN	6271/1 (net) 180 PS (132 kW)/ 1,900 rpm
Max. torque		82.5 kgf·m(597 lbf·ft)/ 1,500 rpm
Bore X stroke		107 x 124 mm (4.21" x 4.88")
Piston displacement		6,700cc (408 in ³)
Batteries		2 X 12V X 100AH
Starting motor		24V, 4.8kW
Alternator		24V, 95Amp

HYDRAULIC SYSTEM

MAIN PUMP

Type	Variable displacement tandem-axial piston pumps
Max. flow	2 X 222 L/min (58.6 US gpm / 48.8 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system

HYDRAULIC MOTORS

Travel	Two-speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING

Implement circuits	350 kgf/cm ² (4,978 psi)
Travel	350 kgf/cm ² (4,978 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,404 psi)
Swing circuit	300 kgf/cm ² (4,409 psi)
Pilot circuit	40 kgf/cm ² (568 psi)
Service valve	Installed

HYDRAULIC CYLINDERS

No. of cylinder bore X stroke	Boom: 2-135 X 1,345 mm (5.3"X 52.9") Arm: 1-145 X 1,620 mm (5.7" X 63.8") Bucket: 1-130 X 1,185 mm (5.1" X 46.7")
----------------------------------	---

DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	21,600 kgf (47,600 lbf)
Max. travel speed (high / low)	5.6 km/hr (3.5 mph) / 3.3 km/hr (2.0 mph)
Gradeability	35° (70 %)
Parking brake	Multi wet disc

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, Dial type

SWING SYSTEM

Swing motor	Fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	11.6 rpm

COOLANT & LUBRICANT CAPACITY

Re-filling	liter	US gal	UK gal
Fuel tank	400	105.7	88.0
Engine coolant	40	10.6	8.8
Engine oil	23.1	6.1	5.1
Swing device	6	1.6	1.3
Final drive (each)	6	1.6	1.3
Hydraulic system (including tank)	285	75.3	62.7
Hydraulic tank	165	43.6	36.3

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	51
No. of carrier rollers on each side	2
No. of track rollers on each side	9
No. of rail guards on each side	2

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 5,850mm (19' 2") boom, 3,050mm (10' 0") arm, SAE heaped 1.08m³ (1.41 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

MAJOR COMPONENT WEIGHT

Upperstructure	5,520 kg (12,170 lb)
Boom (with arm cylinder)	2,460 kg (5,420 lb)
Arm (with bucket cylinder)	1,540 kg (3,400 lb)

OPERATING WEIGHT

Shoes	Width mm (in)	Operating weight	
		kg (lb)	kgf/cm ² (psi)
Triple grouser	600 mm (24")	R260LC-9A 25,200(55,560)	0.51(7.25)
		R260LC-9A H/W 27,450(60,520)	0.53(7.54)
	700 mm (28")	R260LC-9A 25,500(56,220)	0.44(6.26)
		R260LC-9A H/W 28,020(61,770)	0.46(6.54)
	800 mm (32")	R260LC-9A 25,800(56,880)	0.39(5.55)
		R260LC-9A H/W 28,400(62,610)	0.41(5.83)
Double grouser	900 mm (36")	R260LC-9A 26,100(57,540)	0.35(4.98)
Double grouser	700 mm (28")	R260LC-9A H/W 28,620(63,100)	0.47(6.68)

BUCKETS

All buckets are welded with high-strength steel.



SAE
heaped
 m^3 (yd^3)
0.60 (0.78)
0.79 (1.03)



1.03 (1.35)



1.08 (1.41)
1.27 (1.66)
1.50 (1.96)



1.07(1.40) 1.27(1.66)
 1.15(1.50) 1.46(1.91)



1.16 (1.52)

Capacity m^3 (yd^3)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft-in)			
SAE heaped	CECE heaped	Without side cutters	With side cutters		5,850 (19' 2") Boom			
					2,100 (6' 11") Arm	2,500 (8' 2") Arm	3,050 (10' 0") Arm	3,600 (11' 10") Arm
0.60 (0.78)	0.55 (0.72)	760 (29.9)	880 (34.6)	720 (1,590)	●	●	●	●
0.79 (1.03)	0.70 (0.92)	890 (35.0)	1,010 (39.8)	790 (1,740)	●	●	●	●
1.03 (1.35)	0.90 (1.18)	1090 (42.9)	1,210 (47.6)	890 (1,960)	●	●	●	□
1.08 (1.41)	0.95 (1.24)	1,130 (44.5)	1,250 (49.2)	910 (2,010)	●	●	●	□
1.27 (1.66)	1.10 (1.44)	1,290 (50.8)	1,410 (55.5)	1,010 (2,230)	●	□	□	▲
1.50 (1.96)	1.30 (1.70)	1,490 (58.7)	1,610 (63.4)	1,080 (2,380)	●	□	▲	-
<input type="checkbox"/> 1.07 (1.40)	0.95 (1.24)	1,150 (45.3)	-	1,120 (2,470)	●	●	□	▲
<input type="checkbox"/> 1.15 (1.50)	1.00 (1.31)	1,210 (47.6)	-	1,160 (2,560)	●	●	□	▲
<input type="checkbox"/> 1.27 (1.66)	1.10 (1.44)	1,310 (51.6)	-	1,240 (2,730)	●	□	▲	-
<input type="checkbox"/> 1.46 (1.91)	1.28 (1.67)	1,460 (57.5)	-	1,320 (2,910)	□	▲	▲	-
<input type="checkbox"/> 1.16 (1.52)	1.00 (1.31)	1,340 (52.8)	-	1,280 (2,820)	●	□	▲	-

Heavy duty bucket

Rock-Heavy duty bucket

● : Applicable for materials with density of 2,000 kg / m^3 (3,370 lb/ yd^3) or less

: Applicable for materials with density of 1,600 kg / m^3 (2,700 lb/ yd^3) or less

▲ : Applicable for materials with density of 1,100 kg / m^3 (1,850 lb/ yd^3) or less

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 5.85m(19' 2") Boom and 2.1m(6' 11"), 2.5m(8' 2"), 3.05m(10' 0") & 3.6m(11' 10") Arms are available.

DIGGING FORCE


Boom	Length	mm(ft-in)	5,850 (19' 2")				Remark
	Weight	kg(lb)	2,460(5,420)				
Arm	Length	mm(ft-in)	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,600 (11' 10")	[]: Power Boost
	Weight	kg(lb)	1,420 (3,130)	1,450 (3,200)	1,540 (3,400)	1,600 (3,530)	
Bucket digging force	SAE	kN	156.9 [170.4]	156.9 [170.4]	156.9 [170.4]	156.9 [170.4]	[]: Power Boost
		kgf	16000 [17370]	16000 [17370]	16000 [17370]	16000 [17370]	
		lbf	35270 [38290]	35270 [38290]	35270 [38290]	35270 [38290]	
	ISO	kN	178.5 [193.8]	178.5 [193.8]	178.5 [193.8]	178.5 [193.8]	
		kgf	18200 [19760]	18200 [19760]	18200 [19760]	18200 [19760]	
		lbf	40120 [43560]	40120 [43560]	40120 [43560]	40120 [43560]	
Arm crowd force	SAE	kN	134.4 [145.9]	130.4 [141.6]	114.7 [124.6]	104.0 [112.9]	[]: Power Boost
		kgf	13700 [14870]	13300 [14440]	11700 [12700]	10600 [11510]	
		lbf	30200 [32790]	29320 [31830]	25790 [28000]	23370 [25370]	
	ISO	kN	139.3 [151.2]	134.4 [145.9]	118.7 [128.8]	107.9 [117.1]	
		kgf	14200 [15420]	13700 [14870]	12100 [13140]	11000 [11940]	
		lbf	31310 [33990]	30200 [32790]	26680 [28970]	24250 [26330]	

Note: Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin

Dimensions & Working Range

R260LC-9A / R260NLC-9A DIMENSIONS

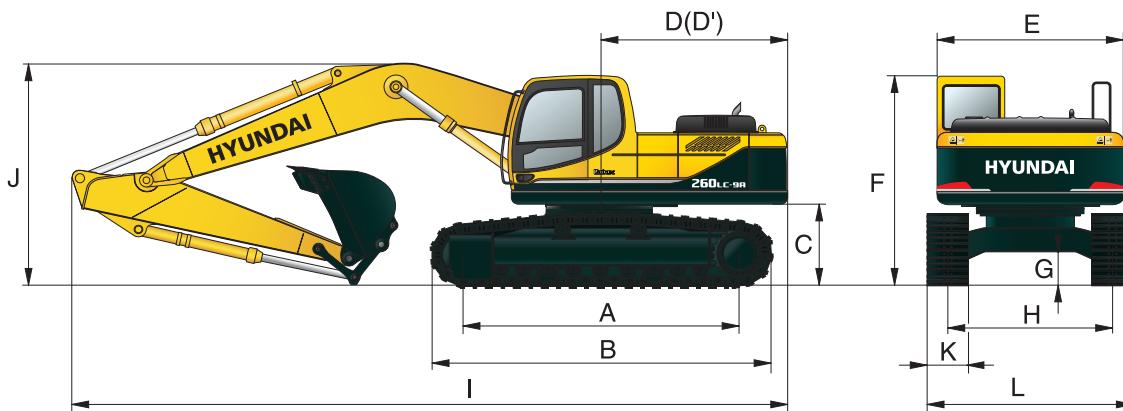


Unit : mm (ft · in)

A Tumbler distance	R260LC-9A	3,830 (12' 7")
	R260NLC-9A	3,830 (12' 7")
B Overall length of crawler		4,640 (15' 3")
C Ground clearance of counterweight		1,115 (3' 8")
D Tail swing radius		2,975 (9' 9")
D' Rear-end length		2,870 (9' 5")
E Overall width of upperstructure		2,840 (9' 4")
F Overall height of cab		2,990 (9' 10")
G Min. ground clearance		480 (1' 7")
H Track gauge	R260LC-9A	2,580 (8' 6")
	R260NLC-9A	2,380 (7' 10")

Boom length	5,850 (19' 2")			
	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,600 (11' 10")
I Overall length	10,050 (32' 12")	10,000 (32' 10")	9,920 (32' 7")	9,910 (32' 6")
J Overall height of boom	3,530 (11' 7")	3,590 (11' 9")	3,220 (10' 7")	3,590 (11' 9")
K Track shoe width	600 (24")	700 (28")	800 (32")	900 (36")
L Overall width	R260LC-9A	3,180 (10' 5")	3,280 (10' 9")	3,380 (11' 1")
	R260NLC-9A	2,980 (9' 9")	-	-

R260LC-9A / R260NLC-9A WORKING RANGE


Unit : mm (ft · in)

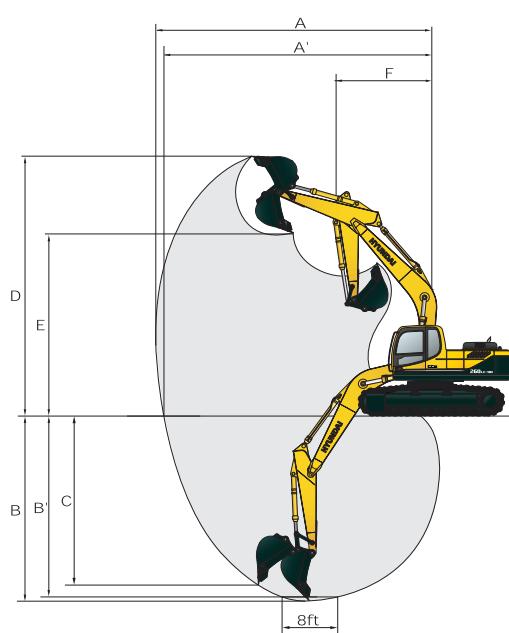

Boom length	5,850 (19' 2")			
	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,600 (11' 10")
A Max. digging reach	9,550 (31' 4")	9,870 (32' 5")	10,360 (33' 12")	10,870 (35' 8")
A' Max. digging reach on ground	9,360 (30' 9")	9,680 (31' 9")	10,190 (33' 5")	10,700 (35' 1")
B Max. digging depth	6,050 (19' 10")	6,450 (21' 2")	7,000 (22' 12")	7,550 (24' 9")
B' Max. digging depth (8' level)	5,840 (19' 2")	6,260 (20' 6")	6,830 (22' 5")	7,400 (24' 3")
C Max. vertical wall digging depth	5,480 (17' 12")	5,640 (18' 6")	6,150 (20' 2")	6,830 (22' 5")
D Max. digging height	9,450 (31' 0")	9,460 (31' 0")	9,670 (31' 9")	9,920 (32' 7")
E Max. dumping height	6,360 (20' 10")	6,420 (21' 1")	6,630 (21' 9")	6,860 (22' 6")
F Min. swing radius	4,420 (14' 6")	4,200 (13' 9")	3,980 (13' 1")	3,900 (12' 10")

Dimensions & Working Range

R260LC-9A HIGH WALKER DIMENSIONS

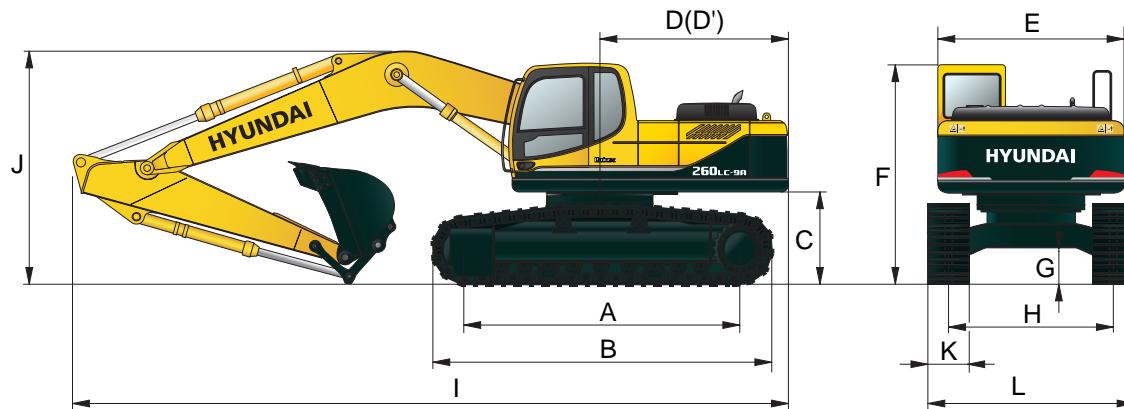


Unit : mm (ft · in)

A Tumbler distance	4,030 (13' 3")
B Overall length of crawler	4,940 (16' 2")
C Ground clearance of counterweight	1,470 (4' 10")
D Tail swing radius	2,975 (9' 9")
D' Rear-end length	2,870 (9' 5")
E Overall width of upperstructure	2,840 (9' 4")
F Overall height of cab	3,345 (10' 12")
G Min. ground clearance	765 (2' 6")
H Track gauge	2,790 (9' 2")

Boom length	5,850 (19' 2")			
	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,600 (11' 10")
I Overall length	10,060 (33' 0")	9,970 (32' 9")	9,760 (32' 0")	9,930 (32' 7")
J Overall height of boom	3,610 (11' 10")	3,750 (12' 4")	3,240 (10' 8")	3,620 (11' 11")
K Track shoe width	Type	Triple grouser		Double grouser
	Width	600 (24")	700 (28")	800 (32")
L Overall width		3,390 (11' 1")	3,490 (11' 5")	3,590 (11' 9")

R260LC-9A HIGH WALKER WORKING RANGE

Unit : mm (ft · in)

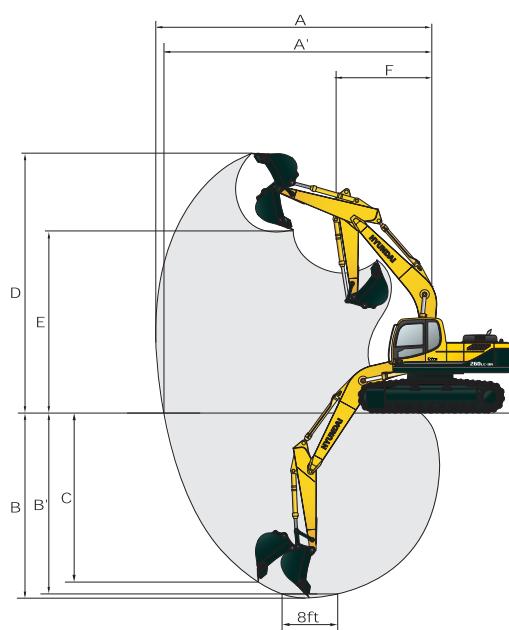

Boom length	5,850 (19' 2")			
	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,600 (11' 10")
A Max. digging reach	9,550 (31' 4")	9,870 (32' 5")	10,360 (33' 12")	10,870 (35' 8")
A' Max. digging reach on ground	9,280 (30' 5")	9,160 (30' 1")	10,110 (33' 2")	10,360 (33' 12")
B Max. digging depth	5,680 (18' 8")	6,080 (19' 11")	6,630 (21' 9")	7,180 (23' 7")
B' Max. digging depth (8' level)	5,470 (17' 11")	5,890 (19' 4")	6,460 (21' 2")	7,030 (23' 1")
C Max. vertical wall digging depth	5,120 (16' 10")	5,300 (17' 5")	5,790 (18' 12")	6,470 (21' 3")
D Max. digging height	9,820 (32' 3")	9,840 (32' 3")	10,040 (32' 11")	10,280 (33' 9")
E Max. dumping height	6,730 (22' 1")	6,790 (22' 3")	7,000 (22' 12")	7,220 (23' 8")
F Min. swing radius	4,140 (13' 7")	4,030 (13' 3")	3,940 (12' 11")	3,900 (12' 10")

Lifting Capacity

R260LC-9A

 Rating over-front  Rating over-side or 360 degree

Boom : 5.85m (19' 2") / Arm : 2.10 m (6' 11") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		
												
6.0 m (20 ft)	kg lb					*5790 *12760	*5790 *12760			5220 11510	3200 7050	8.32 (27.3)
4.5 m (15 ft)	kg lb			*7810 *17220	*7810 *17220	*6510 *14350	5570 12280	*6000 *13230	3690 8140	4520 9960	2710 5970	8.91 (29.2)
3.0 m (10 ft)	kg lb			*10260 *22620	8200 18080	*7600 *16760	5190 11440	5900 13010	3550 7830	4210 9280	2480 5470	9.17 (30.1)
1.5 m (5 ft)	kg lb			*12300 *27120	7520 16580	4850 18190	5720 10690	3380 12610	4170 7450	2430 9190	9.14 (30.0)	
Ground Line	kg lb			13110 28900	7250 15980	8010 17660	4640 10230	5600 12350	3270 7210	4410 9720	2580 5690	8.80 (28.9)
-1.5 m (-5 ft)	kg lb	*15460 *34080	15160 33420	13090 28860	7230 15940	7940 17500	4580 10100			5060 11160	2990 6590	8.13 (26.7)
-3.0 m (-10 ft)	kg lb	*17100 *37700	15470 34110	*12090 *26650	7390 16290	8050 17750	4680 10320			*6290 *13870	3980 8770	6.98 (22.9)
-4.5 m (-15 ft)	kg lb	*13360 *29450	*13360 *29450	*9460 *20860	7790 17170							

Boom : 5.85m (19' 2") / Arm : 2.50 m (8' 2") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius								At max. reach			
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	
													
6.0 m (20 ft)	kg lb									4900 10800	3000 6610	8.67 (28.4)	
4.5 m (15 ft)	kg lb									4280 9440	2550 5620	9.23 (30.3)	
3.0 m (10 ft)	kg lb			*9550 *21050	8410 18540	*7210 *15900	5280 11640	5950 13120	3590 7910	3990 8800	2340 5160	9.48 (31.1)	
1.5 m (5 ft)	kg lb			*11790 *25990	7650 16870	8310 18320	4910 10820	5750 12680	3410 7520	3950 8710	2290 5050	9.45 (31.0)	
Ground Line	kg lb			*12990 *28640	7280 16050	8030 17700	4660 10270	5600 12350	3270 7210	4150 9150	2410 5310	9.13 (30.0)	
-1.5 m (-5 ft)	kg lb	*15100 *33290	14960 32980	13050 28770	7190 15850	7910 17440	4560 10050	5550 12240	3220 7100	4690 10340	2750 6060	8.49 (27.9)	
-3.0 m (-10 ft)	kg lb	*16360 *36070	*16360 *36070	*18120 *39950	15250 33620	*12470 *27490	7300 16090	7970 17570	4610 10160		5940 13100	3550 7830	7.41 (24.3)
-4.5 m (-15 ft)	kg lb			*14860 *32760	*14860 *32760	*10430 *22990	7620 16800						

Boom : 5.85m (19' 2") / Arm : 3.05 m (10' 0") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius								At max. reach					
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity			
														m (ft)	
6.0 m (20 ft)	kg lb									*3700 *8160	*3700 *8160	4400 9700	2660 5860	9.22 (30.2)	
4.5 m (15 ft)	kg lb									*5350 *11790	*5350 *11790	*5060 *11160	3830 8440	2280 8550	9.74 (32.0)
3.0 m (10 ft)	kg lb			*13640 *30070	*13640 *30070	*8400 *18520	*8400 *18520	*6540 *14420	5360 11820	*5660 *12480	3620 7980	3630 8000	2090 4610	9.98 (32.7)	
1.5 m (5 ft)	kg lb			*9450 *20830	*9450 *20830	*10870 *23960	*10870 *23960	*7820 *17240	4950 10910	*5750 *12680	3400 7500	3580 7890	2040 4500	9.95 (32.6)	
Ground Line	kg lb			*10570 *23300	*10570 *23300	*12490 *27540	*12490 *27540	7280 16050	8010 17660	4640 10230	5560 12260	3230 7120	3730 8220	2130 4700	9.65 (31.7)
-1.5 m (-5 ft)	kg lb	*9940 *21910	*9940 *21910	*13870 *30580	*13870 *30580	12930 28510	7090 15630	7830 17260	4480 9880	5460 12040	3140 6920	4150 9150	2390 5270	9.05 (29.7)	
-3.0 m (-10 ft)	kg lb	*13540 *29850	*13540 *29850	*18430 *40630	*18430 *40630	14860 32760	*12780 *28180	7110 15670	7820 17240	4470 9850		5080 11200	2980 6570	8.06 (26.4)	
-4.5 m (-15 ft)	kg lb	*17830 *39310	*17830 *39310	*16580 *36550	15340 33820	*11360 *25040	7340 16180	8020 17680	4640 10230		*5940 *13100	4480 9880	6.48 (21.3)		

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R260LC-9A

 Rating over-front  Rating over-side or 360 degree

Boom : 5.85m (19' 2") / Arm : 3.60 m (11' 10") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius						At max. reach								
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity		
														m (ft)		
6.0 m (20 ft)	kg lb									*3930 *8660	*3930 *8660			3960 8730	2360 5200 (32.1)	
4.5 m (15 ft)	kg lb									*4530 *9990	3890 8580	*2500 *5510	*2500 *5510	3530 7780	2040 4500 (33.7)	
3.0 m (10 ft)	kg lb					*5890 *12990	5490 12100	*5190 *11440	3670 8090	*3590 *7910	2550 5620	3310 7300	1870 4120	10.49 (34.4)		
1.5 m (5 ft)	kg lb		*12610 *27800	*12610 *27800	*9960 *21960	8040 17730	*7260 *16010	5040 11110	5790 12760	3430 7560	4210 9280	2430 5360	3260 7190	1820 4010	10.46 (34.3)	
Ground Line	kg lb		*11020 *24290	*11020 *24290	*11930 *26300	7390 16290	8070 17790	4680 10320	5570 12280	3230 7120	4090 9020	2320 5110	3380 7450	1890 4170	10.18 (33.4)	
-1.5 m (-5 ft)	kg lb	*9010 *19860	*9010 *19860	*13200 *29100	*13200 *28440	*12900 15630	7090 17260	7830 9850	4470 11970	5430 6830			3710 8180	2100 4630	9.62 (31.6)	
-3.0 m (-10 ft)	kg lb	*12120 *26720	*12120 *26720	*16820 *37080	14680 32360	12880 28400	7040 15520	7750 17090	4400 9700	5390 11880	3070 6770			4420 9740	2550 5620	8.71 (28.6)
-4.5 m (-15 ft)	kg lb	*15830 *34900	*15830 *34900	*17940 *39550	15050 33180	*12020 *26500	7180 15830	7850 17310	4490 9900					*5790 *12760	3580 7890	7.30 (24.0)

R260NLC-9A

Boom : 5.85m (19' 2") / Arm : 2.10 m (6' 11") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius						At max. reach				
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
												m (ft)
6.0 m (20 ft)	kg lb					*5790 *12760	5290 11660			5200 11460	2870 6330	8.32 (27.3)
4.5 m (15 ft)	kg lb		*7810 *17220	*7810 *17220	*6510 *14350	5030 11090	*6000 *13230	3310 7300	4500 9920	2410 5310	8.91 (29.2)	
3.0 m (10 ft)	kg lb		*10260 *22620	7330 16160	*7600 *16760	4660 10270	5870 12940	3170 6990	4190 9240	2190 4830	9.17 (30.1)	
1.5 m (5 ft)	kg lb		*12300 *27120	6670 14700	8210 18100	4330 9550	5690 12540	3010 6640	4150 9150	2150 4740	9.14 (30.0)	
Ground Line	kg lb		13050 28770	6410 14130	7970 17570	4120 9080	5570 12280	2900 6390	4390 9680	2280 5030	8.80 (28.9)	
-1.5 m (-5 ft)	kg lb	*15460 *34080	13120 28920	13030 28730	6390 14090	7900 17420	4060 8950			5040 11110	2660 5860	8.13 (26.7)
-3.0 m (-10 ft)	kg lb	*17100 *37700	13420 29590	*12090 *26650	6540 14420	8020 17680	4160 9170			*6290 *13870	3560 7850	6.98 (22.9)
-4.5 m (-15 ft)	kg lb	*13360 *29450	*13360 *29450	*9460 *20860	6930 15280							

Boom : 5.85m (19' 2") / Arm : 2.50 m (8' 2") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius						At max. reach					Reach	
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
6.0 m (20 ft)	kg lb											4880 10760	2680 5910	8.67 (28.4)
4.5 m (15 ft)	kg lb							*6070 *13380	5130 11310	*5630 *12410	3380 7450	4260 9390	2270 5000	9.23 (30.3)
3.0 m (10 ft)	kg lb					*9550 *21050	7530 16600	*7210 *15900	4750 10470	5920 13050	3210 7080	3970 8750	2070 4560	9.48 (31.1)
1.5 m (5 ft)	kg lb					*11790 *25990	6790 14970	8270 18230	4380 9660	5720 12610	3030 6680	3930 8660	2020 4450	9.45 (31.0)
Ground Line	kg lb					*12990 *28640	6440 14200	7990 17610	4140 9130	5570 12280	2900 6390	4130 9110	2120 4670	9.13 (30.0)
-1.5 m (-5 ft)	kg lb		*15100 *33290	12930 28510	12990 28640	6350 14000	7880 17370	4040 8910	5520 12170	2850 6280	2850 10300	4670 10300	2440 5380	8.49 (27.9)
-3.0 m (-10 ft)	kg lb	*16360 *36070	*16360 *36070	*18120 *39950	13210 29120	*12470 *27490	6450 14220	7940 17500	4090 9020			5910 13030	3170 6990	7.41 (24.3)
-4.5 m (-15 ft)	kg lb					*14860 *32760	13750 30310	*10430 *22990	6760 14900					

1. Lifting capacity is based on SAE J1097, ISO 10567.

4. (*) indicates the load limited by hydraulic capacity.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

Lifting Capacity

R260NLC-9A

 Rating over-front  Rating over-side or 360 degree

Boom : 5.85m (19' 2") / Arm : 3.05 m (10' 0") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach		
														m (ft)		
6.0 m (20 ft)	kg lb									*3700 *8160	3570 7870	4380 9660	2370 5220	9.22 (30.2)		
4.5 m (15 ft)	kg lb									*5350 *11790	5230 11530	*5060 *11160	3440 7580	3860 8510	2020 4450	9.74 (32.0)
3.0 m (10 ft)	kg lb			*13640 *30070	*13640 *30070	*8400 *18520	7780 17150	*6540 *14420	4830 10650	*5660 *12480	3240 7140	3610 7960	1840 4060	9.98 (32.7)		
1.5 m (5 ft)	kg lb			*9450 *20830	*9450 *20830	*10870 *23960	6940 15300	*7820 *17240	4420 9740	5720 12610	3030 6680	3560 7850	1790 3950	9.95 (32.6)		
Ground Line	kg lb			*10570 *23300	*10570 *23300	*12490 *27540	6430 14180	7980 17590	4120 9080	5530 12190	2850 6280	3710 8180	1860 4100	9.65 (31.7)		
-1.5 m (-5 ft)	kg lb	*9940 *21910	*9940 *21910	*13870 *30580	12620 27820	12870 28370	6250 13780	7790 17170	3960 8730	5430 11970	2760 6080	4130 9110	2100 4630	9.05 (29.7)		
-3.0 m (-10 ft)	kg lb	*13540 *29850	*13540 *29850	*18430 *40630	12840 28310	*12780 *28180	6270 13820	7780 17150	3950 8710			5060 11160	2640 5820	8.06 (26.4)		
-4.5 m (-15 ft)	kg lb	*17830 *39310	*17830 *39310	*16580 *36550	13290 29300	*11360 *25040	6490 14310	7980 17590	4120 9080			*5940 *13100	4010 8840	6.48 (21.3)		

Boom : 5.85m (19' 2") / Arm : 3.60 m (11' 10") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach						
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach			
															m (ft)			
6.0 m (20 ft)	kg lb									*3930 *8660	3660 8070			3940 8690	2090 4610	9.77 (32.1)		
4.5 m (15 ft)	kg lb									*4530 *9990	3510 7740	*2500 *5510	2350 5180	3510 7740	1790 3950	10.27 (33.7)		
3.0 m (10 ft)	kg lb									*5890 *12990	4940 10890	*5190 *11440	3290 7250	*3590 *7910	2250 4960	3290 7250	1630 3590	10.49 (34.4)
1.5 m (5 ft)	kg lb	*12610 *27800	*12610 *27800	*9960 *21960	7160 15790	*7260 *16010	4510 9940	5760 12700	3060 6750	9220 9220	4180 4700	2130 7140	3240 3480	1580 3480	10.46 (34.3)			
Ground Line	kg lb	*11020 *24290	*11020 *24290	*11930 *26300	6540 14420	8030 17700	4160 9170	5540 12210	2860 6310	4070 8970	2030 4480	3360 7410	1640 3620	10.18 (33.4)				
-1.5 m (-5 ft)	kg lb	*9010 *19860	*9010 *19860	*13200 *29100	12560 27690	12890 28420	6250 13780	7790 17170	3950 8710	5400 11900	2730 6020			3690 8140	1830 4030	9.62 (31.6)		
-3.0 m (-10 ft)	kg lb	*12120 *26720	*12120 *26720	*16820 *37080	12660 27910	12820 28260	6190 13650	7710 17000	3880 8550	5370 11840	2700 5950			4390 9680	2240 4940	8.71 (28.6)		
-4.5 m (-15 ft)	kg lb	*15830 *34900	*15830 *34900	*17940 *39550	13010 28680	*12020 *26500	6330 13960	7820 17240	3970 8750					*5790 *12760	3190 7030	7.30 (24.0)		

R260LC-9A HIGH WALKER

 Rating over-front  Rating over-side or 360 degree

Boom : 5.85m (19' 2") / Arm : 2.10 m (6' 11") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach				
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Capacity		Reach		
														m (ft)		
6.0 m (20 ft)	kg lb									*5910 *13030	*5910 *13030			*5290 *11660	3780 8330	8.49 (27.9)
4.5 m (15 ft)	kg lb			*8350 *18410	*8350 *18410	*6750 *14880	6680 14730	*6080 *13400	4530 9990	5310 11710	3310 7300			9.00 (29.5)		
3.0 m (10 ft)	kg lb			*10830 *23880	9880 21780	*7870 *17350	6290 13870	*6580 *14510	4370 9630	5040 11110	3110 6860			9.19 (30.2)		
1.5 m (5 ft)	kg lb			*12610 *27800	9280 20460	*8890 *19600	5970 13160	6840 15080	4210 9280	5080 11200	3120 6880			9.09 (29.8)		
Ground Line	kg lb			*13240 *29190	9080 20020	*9480 *20900	5790 12760	6740 14860	4120 9080	5450 12020	3360 7410			8.68 (28.5)		
-1.5 m (-5 ft)	kg lb	*17510 *38600	*17510 *38600	*12940 *28530	9100 20060	*9460 *20860	5760 12700					*6350 *14000	3950 8710	7.91 (26.0)		
-3.0 m (-10 ft)	kg lb	*16440 *36240	*16440 *36240	*11670 *25730	9310 20530	*8440 *18610	5920 13050					*6190 *13650	5420 11950	6.61 (21.7)		

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R260LC-9A HIGH WALKER

 Rating over-front  Rating over-side or 360 degree

Boom : 5.85m (19' 2") / Arm : 2.50 m (8' 2") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach Capacity		Reach m (ft)			
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)							
																	
6.0 m (20 ft)	kg lb							*5440 *11990	*5440 *11990				*4950 *10910	3560 7850	8.83 (29.0)		
4.5 m (15 ft)	kg lb					*7630 *16820	*7630 *16820	*6320 *13930	*6320 *13930	*5730 *12630	4600 10140	10140 11090	5030 6920	3140 (30.6)	9.32		
3.0 m (10 ft)	kg lb					*10140 *22350	10080 22220	*7500 *16530	6380 14070	*6300 *13890	4410 9720	4410 10560	4790 6500	2950 (31.2)	9.50		
1.5 m (5 ft)	kg lb					*12180 *26850	9390 20700	*8620 *19000	6020 13270	6860 15120	4230 9330	4810 10600	2940 6480	2940 (30.8)	9.40		
Ground Line	kg lb					*13120 *28920	9090 20040	*9350 *20610	5800 12790	6730 14840	4110 9060	5120 11290	3140 6920	9.01 (29.6)	9.01		
-1.5 m (-5 ft)	kg lb	*12120 *26720	*12120 *26720	*16630 *36660	*16630 *36660	*13100 *28880	9050 19950	*9510 *20970	5730 12630			5900 13010	3640 8020	8.28 (27.2)	8.28		
-3.0 m (-10 ft)	kg lb	*17840 *39330	*17840 *39330	*17530 *38650	*17530 *38650	*12140 *26760	9210 20300	*8850 *19510	5830 12850				*6280 *13850	4810 10600	7.07 (23.2)	7.07	
-4.5 m (-15 ft)	kg lb			*13700 *30200	*13700 *30200	*9570 *21100		*9570 *21100									

Boom : 5.85m (19' 2") / Arm : 3.05 m (10' 0") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach Capacity		Reach m (ft)				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)								
																		
6.0 m (20 ft)	kg lb											*4140 *9130	*4140 *9130	3190 (30.7)				
4.5 m (15 ft)	kg lb							*5610 *12370	*5610 *12370	*5180 *11420	4650 10250	4590 10120	2830 6240	9.82 (32.2)	9.82			
3.0 m (10 ft)	kg lb		*15320 *33770	*15320 *33770	*9030 *19910	*8650 *15100	6450 14220	*5830 *12850	4430 9770	4370 9630	2660 5860	2800 (32.8)	9.99	9.99				
1.5 m (5 ft)	kg lb		*9310 *20530	*9310 *20530	*11350 *25020	9510 20970	*8090 *17840	6050 13340	*6510 *14350	4220 9300	4380 9660	2650 5840	2650 (32.5)	9.90				
Ground Line	kg lb	*7350 *16200	*7350 *16200	*11240 *24780	*11240 *24780	*12710 *28020	9060 19970	*9010 *19860	5760 12700	6680 14730	4060 8950	4620 10190	2800 6170	9.53 (31.3)	9.53			
-1.5 m (-5 ft)	kg lb	*10760 *23720	*10760 *23720	*14820 *32670	*14820 *32670	*13100 *28880	8920 19670	*9410 *20750	5640 12430	6610 14570	3990 8800	5220 11510	3180 7010	8.85 (29.0)	8.85			
-3.0 m (-10 ft)	kg lb	*14470 *31900	*14470 *31900	*18710 *41250	*18710 *41250	*12560 *27690	9000 19840	*9130 *20130	5660 12480				*6000 *13230	4040 8910	7.76 (25.5)	7.76		
-4.5 m (-15 ft)	kg lb			*15670 *34550	*15670 *34550	*10780 *23770	9290 20480											

Boom : 5.85m (19' 2") / Arm : 3.60 m (11' 10") / Bucket : 1.08 m³ (1.41 yd³) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach Capacity		Reach m (ft)				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)								
																		
6.0 m (20 ft)	kg lb											*4150 *9150	*4150 *9150					
4.5 m (15 ft)	kg lb											*4670 *10300	*4670 *10300	4190 *6190				
3.0 m (10 ft)	kg lb		*12560 *27690	*12560 *27690	*7950 *17530	*7950 *17530	*6220 *13710	*6220 *13710	*5370 *11840	4480 9880	*3790 *8360	3200 7050	4000 8820	2410 5310	10.50 (34.4)			
1.5 m (5 ft)	kg lb		*11430 *25200	*11430 *25200	*10510 *23170	9730 21450	*7570 *16690	6130 13510	*6140 *13540	4240 9350	*4350 *9590	3070 6770	4000 8820	2390 5270	10.42 (34.2)			
Ground Line	kg lb	*6810 *15010	*6810 *15010	*11370 *25070	*11370 *25070	*12250 *25070	9150 20170	*8650 *19070	5800 12790	6680 14730	4050 8930	*4060 *8950	2980 6570	4200 9260	2510 5530	10.07 (33.0)		
-1.5 m (-5 ft)	kg lb	*9710 *21410	*9710 *21410	*13930 *30710	*13930 *30710	*13000 *28660	8910 19640	*9270 *20440	5610 12370	6560 14460	3940 8690			4670 10300	2810 6190	9.44 (31.0)		
-3.0 m (-10 ft)	kg lb	*12930 *28510	*12930 *28510	*17900 *39460	*17900 *39460	*12840 *39460	8900 28310	*9280 *20460	5580 12300	6560 14460	3940 8690			5650 12460	3450 7610	8.43 (27.7)		
-4.5 m (-15 ft)	kg lb	*16850 *37150	*16850 *37150	*17220 *37960	*17220 *37960	*11600 *25570	9100 20060	*8340 *18390	5720 12610					*5770 *12720	5000 11020	6.86 (22.5)		

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates the load limited by hydraulic capacity.

STANDARD EQUIPMENT

<u>ISO Standard cabin</u>
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Radio & USB player
Handsfree mobile phone system with USB
Transparent cabin roof-cover
12 volt power outlet (24V DC to 12V DC converter)
Sun visor
<u>Computer aided power optimization (New CAPO) system</u>
3-power mode, 2-work mode, User mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
<u>Automatic climate control</u>
Air conditioner & heater
Defroster
<u>Self-diagnostics system</u>
<u>Starting Aid (air grid heater) for cold weather</u>
<u>Centralized monitoring</u>
LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check engine
Overload
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed/High speed
Fuel warmer
Auto idle
<u>Door and cab locks, one key</u>
<u>Three outside rearview mirrors</u>
<u>Mechanical suspension seat with heater</u>
<u>Pilot-operated slideable joystick</u>
<u>Console box height adjust system</u>
<u>Four front working lights</u>
Electric horn
Batteries (2 x 12V x 100 AH)
<u>Battery master switch</u>
Removable clean-out dust net for cooler
<u>Automatic swing brake</u>
<u>Removable reservoir tank</u>
Fuel pre-filter with fuel warmer
<u>Boom holding system</u>
<u>Arm holding system</u>
Track shoes (600mm, 24")
<u>Track rail guard</u>
<u>Accumulator for lowering work equipment</u>
<u>Electric transducer</u>
<u>Lower frame under cover (Normal)</u>
Viscous fan clutch

OPTIONAL EQUIPMENT

<u>Fuel filler pump (50 L/min)</u>
Beacon lamp
<u>Safety lock valve for boom cylinder with overoad warning device</u>
<u>Safety lock valve for arm cylinder</u>
<u>Single-acting piping kit (breaker, etc.)</u>
<u>Double-acting piping kit (clamshell, etc.)</u>
Quick coupler
Travel alarm
<u>Booms</u>
5.85 m, 19' 2"
5.85 m, 19' 2" Heavy duty
<u>Arms</u>
2.1 m, 6' 11"
2.5 m, 8' 2"
3.05 m, 10' 0"
3.6 m, 11' 10"
3.05 m, 10' 0" Heavy duty
<u>Cabin FOPS/FOG (ISO/DIS 10262 Level II)</u>
FOPS (Falling Object Protective Structure)
FOG (Falling Object Guard)
<u>Cabin ROPS (ISO 12117-2)</u>
ROPS (Roll Over Protective Structure)
<u>Cabin roof-steel cover</u>
Cabin lights
<u>Cabin front window rain guard</u>
<u>Track shoes</u>
Triple grousers shoe (700mm, 28")
Triple grousers shoe (800mm, 32")
Triple grousers shoe (900mm, 36")
Double grousers shoe (700mm, 28")
Full track rail guard (High walker only)
<u>Lower frame under cover (Additional)</u>
<u>Pre-heating system, coolant</u>
Tool kit
Operator suit
Rearview camera
<u>Seat</u>
Adjustable air suspension seat with heater
Pattern change valve (2 patterns)
Hi-mate (Remote Management System)

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT